

THC15A WEEKLY PROGRAMMABLE TIMER


BASIC FEATURES:

- ◆ DIN Rail Installation
- ◆ Advanced pre-setting one week before
- ◆ Digital electronic timer switch with daily programs
- ◆ Repeat programs with 17 on/off setting and manual over-ride
- ◆ Lithium battery power reserve when electric supply cut off
- ◆ Auto timer error correction $\pm 30\text{sec}$, weekly

TECHNICAL DATA:

- ◆ Voltage rating: 12VDC (220~240VAC optional)
- ◆ Hysteresis: 2 sec/day (25°C)
- ◆ ON/OFF operation: 17 ON/OFF
- ◆ Power consumption: 7.5VA (MAX)
- ◆ Service life: Mechanical 10^7 , Electrical 10^7
- ◆ Display: LCD
- ◆ Minimum interval: 1 minute
- ◆ Weight: approx 150g
- ◆ Switching contact: 1 changeover switch
- ◆ Power reserve: 3 years (Lithium battery)
- ◆ Ambient temperature: -10~+40 °C
- ◆ Ambient humidity: 35~85%RH

DIMENSIONS:

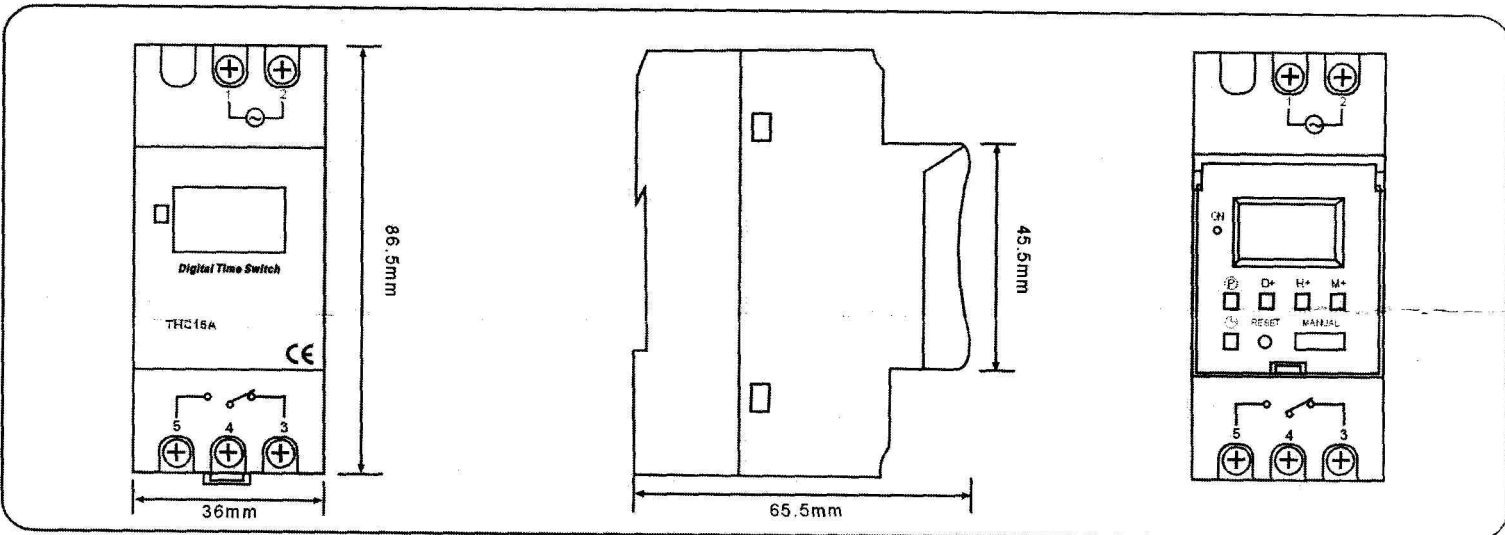

OPERATION INSTRUCTION:

1. To start switch: press reset key.
2. At FirstTime, if you want To the present time, please press \ominus key, then press D+, H+, M+ to adjust the number to the present time.
3. Programming as follows:

Step	Key	Programming
1	Press P	Setting 1 ON time(display 1on)
2	Press H+/M+	Setting hours and minutes
3	Press D+	Select same everyday, different everyday, MO-FR, MO-SA, SA-SU, MO WE FR, TU TH SA, MO-WE, TH-SA. (If same everyday, no Need to press this key)
4	Press P	Setting 1 OFF time (display 1off)
5	Press H+/M+	Setting hours and minutes turn off time
6	Press D+	If you want the same setting every day, you need not press this key
7	Repeat step2~6	Set 2-17 on/off time
8	Press \ominus	End

If you do not require 17 settings, press " \ominus " to the end.